hese pumps are suitable for civil and industrial uses to pump clean water and chemically aggressive liquid.

They have a compact size and are extremely reliable, very simple to use and almost maintenance—free.

Pump body: Stainless Steel Alsl304

Impeller: Stainless Steel

Motor: Closed, externally ventilated

**Insulation:** Class B

**Duty: Continuously Rated** 

Mechanical Seal: 15mm ceramic teatite/

metalized carbon




4 models available

From 0.55kw to 1.5kw



## H(m)

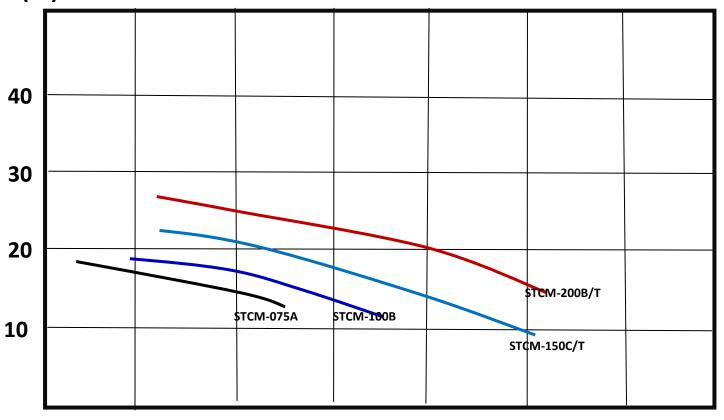


0 50 100 150 200 250 300 L/min

<b>TYPE</b>	PC	<u>WER</u>	<b>FLOW</b>	<b>HEAD</b>		
	HP	KW	(I/min)	(m) 4-19		
STCM-075A	0.75	37	120-101			
STCM-100B	1	0.75	180-40	11-19		
STCM-150C/T	1.5	1.1	260-60	9-21.5		
STCM-200B/T	2	1.5	260-60	15-25.5		

**Available From** 



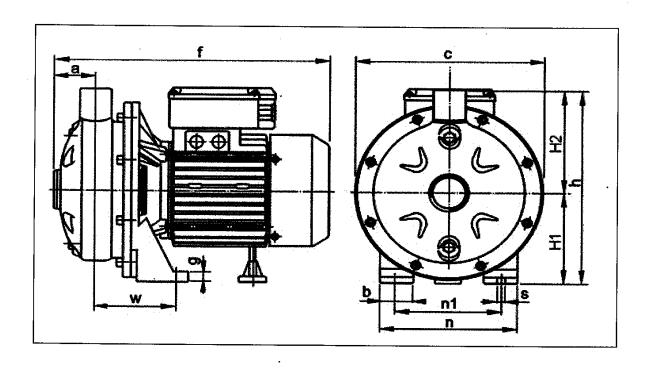

IMENSIONS					ž.							
TYPE		ſ			IMENS	1				7		
	đ		h	C	H1	H2	n	n1	W	b	g	s
STCM-050	52	302	196	170	88	108	130	100	80	30	9	7
STCM-075A	52	302	196	170	88	108	130	100	80	30	9	7
STCM-100A	52	315	232	213	108	124	158	120	92	39	9	9
STCM-100B	52	315	232	213	108	124	158	120	92	39	9	9
STCM-120/T	52	315	232	213	108	124	158	120	92	39	9	9
STCM-150A/T	52	386	252	213	108	124	158	120	92	39	11	9
STCM-150B/T	52	386	252	213	108	124	158	120	92	39	11	9
STCM-150C/T	52	386	252	213	108	124	158	120	92	39	11	9
STCM-200A/T	52	386	252	213	108	124	158	120	92	39	11	9
STCM-200B/T	52	386	252	213	108	124	158	120	92	39	11	9
STCM-250A/T	52	386	252	213	108	124	158	120	92	39	11	9
STCM-250B/T	52	386	252	213	108	124	158	120	92	39	11	9