

-  Clean water
-  Domestic use
-  Civil use



TOP MULTI 1



TOP MULTI 2-3-4-5

PERFORMANCE RANGE

- Flow rate up to **120 l/min** (7.2 m³/h)
- Head up to **52 m**

INSTALLATION AND USE

TOPMULTI® pumps are designed to transfer **clean water** free from abrasive particles and liquids that will not damage the pump's components. Efficient and reliable, they are ideal for domestic applications involving tanks, reservoirs, and deep wells. They are also perfect for collecting rainwater from water tanks (rain barrels) for manual watering or irrigation systems.

APPLICATION LIMITS

- Maximum operating depth below water level:
 - up to **3 m** for TOP MULTI 1
 - up to **10 m** for TOP MULTI 2-3-4-5 (with an appropriately sized power cable)
- Liquid temperature up to **+40 °C**
- Draining capability:
 - up to **25 mm** from the bottom for TOP MULTI 1
 - up to **35 mm** from the bottom for TOP MULTI 2-3-4-5

INCLUDES

- ✳ Power cable length **10 m**
- ✳ Float switch
- ✳ Anti-vibration feet
- ✳ Hose connector **Ø 35 mm**
- ✳ Sleeve with clapet valve (for TOP MULTI 2-3-4-5)



PATENTS - TRADE MARKS - MODELS

- Registered Community Model No. 000885587 for TOP MULTI 2-3-4-5
- TOP MULTI® Registered trademark No. 0001334477


AVAILABLE UPON REQUEST

- ✳ Different voltage requirements 60 Hz frequency


CURVES AND PERFORMANCE DATA

50 Hz

TOP MULTI 1 - 2 - 4

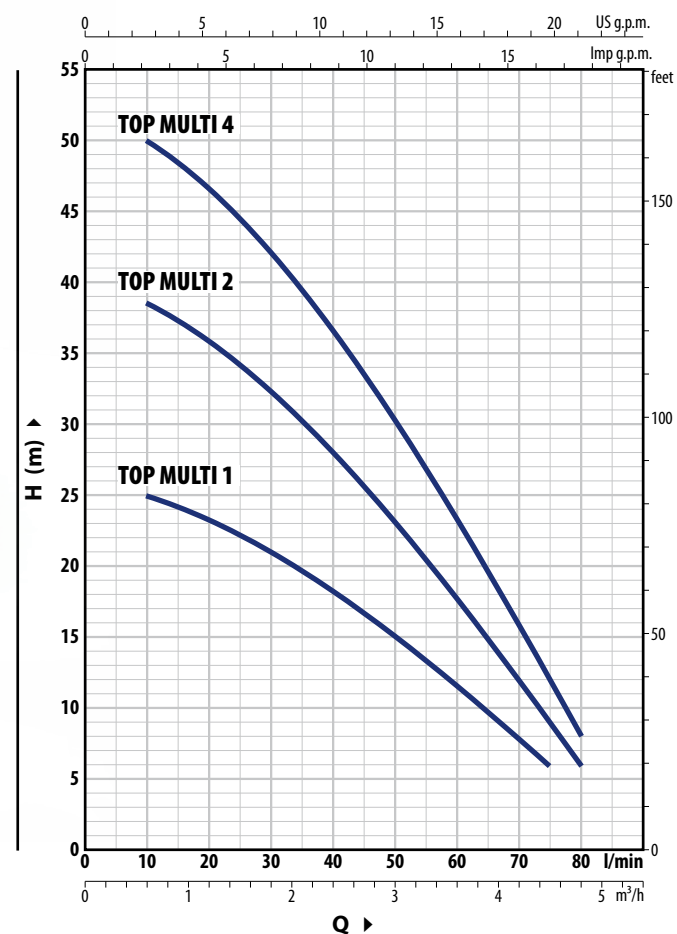

TOP MULTI 3 - 5

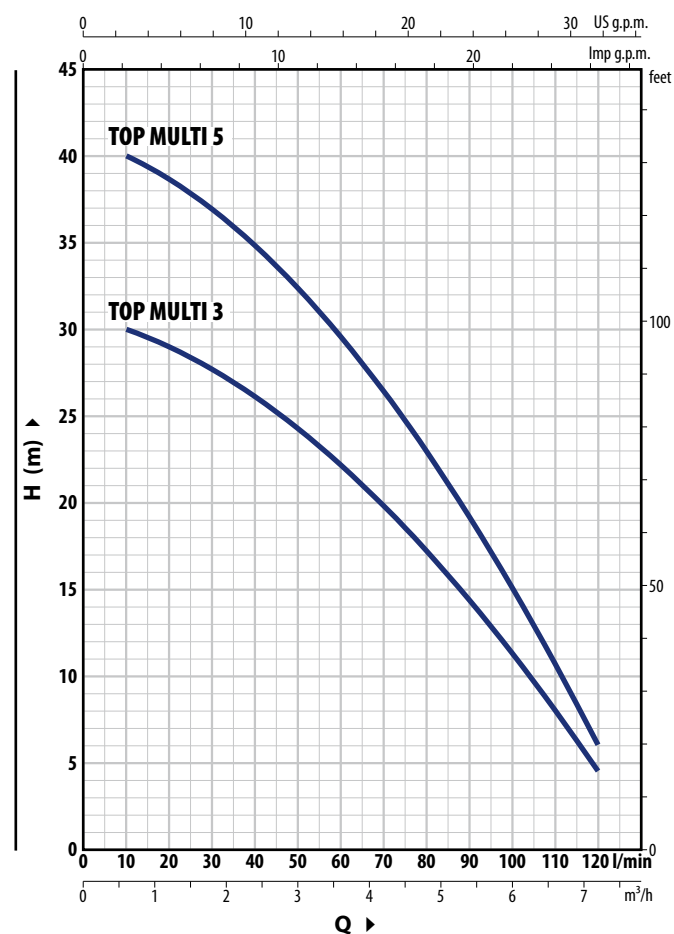

TOP MULTI 1 - 2 - 4

TYPE	POWER (P ₂)		Q m³/h l/min	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.5	4.8
Single-phase	kW	HP		0	10	20	30	40	50	60	70	75	80
TOP MULTI 1	0.37	0.50	H metres	26	25	23.3	21	18.3	15	11.6	8	6	
TOP MULTI 2	0.55	0.75		40	38.5	36	32.5	28	23	17.7	12	9	6
TOP MULTI 4	0.75	1		52	50	46.5	42	36.5	30.5	23.3	15.8	12	8

TOP MULTI 3 - 5

TYPE	POWER (P ₂)		Q												
	kW	HP		m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0
Single-phase				l/min	0	10	20	30	40	50	60	70	80	90	100
TOP MULTI 3	0.55	0.75	H metres		30.5	30	29	27.5	26	24.3	22.2	19.8	17.2	14.4	11.3
TOP MULTI 5	0.75	1			41	40	38.5	37	35	32.5	29.5	26.5	23	19.2	15

Q = Flow rate H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

ABSORPTION

TYPE	VOLTAGE
Single-phase	230 V
TOP MULTI 1	2.0 A
TOP MULTI 2	3.4 A
TOP MULTI 3	3.6 A
TOP MULTI 4	3.9 A
TOP MULTI 5	3.9 A