

TOP MULTI-EVO

Multi-stage submersible pumps

 Clean water

 Domestic use

 Civil use



TOP MULTI 1 - EVO



TOP MULTI 2-3-4-5 - EVO

PERFORMANCE RANGE

- Flow rate up to **120 l/min** (7.2 m³/h)
- Head up to **52 m**

INSTALLATION AND USE

TOP MULTI-EVO pumps are designed to transfer **clean water** free from abrasive particles and liquids that will not damage the pump's components. Efficient and reliable, they are ideal for domestic applications involving tanks, reservoirs, and deep wells. They are also perfect for collecting rainwater from water tanks (rain barrels) for manual watering or irrigation systems.

APPLICATION LIMITS

- Maximum operating depth below water level:
 - up to **3 m** for TOP MULTI 1-EVO
 - up to **10 m** for TOP MULTI 2-3-4-5 EVO (with an appropriately sized power cable)
- Liquid temperature up to **+40 °C**
- Draining capability:
 - up to **25 mm** from the bottom for TOP MULTI 1-EVO
 - up to **35 mm** from the bottom for TOP MULTI 2-3-4-5 EVO
- Manometric suction head up to **7 m**

PATENTS - TRADE MARKS - MODELS

- TOP MULTI® Registered trademark No. 0001334477

INCLUDES

- ✳ **10 m** power cable
- ✳ Float switch
- ✳ Hose connector **Ø 35 mm**
- ✳ Complete sleeve with clapet valve

AVAILABLE UPON REQUEST

- ✳ Different voltage requirements 60 Hz frequency
- ✳ **KGE - Floating suction kit**



The KGE kit enables suction about 10 cm below the water surface, avoiding floating debris and sediment, thereby protecting the pump from damage.


Includes:

- 30 mm PVC spiral hose 1.5 metres long
- stainless steel suction filter
- spherical polyethylene float
- hose fittings Ø 30 mm


CURVES AND PERFORMANCE DATA

50 Hz

TOP MULTI 1-2-4 EVO

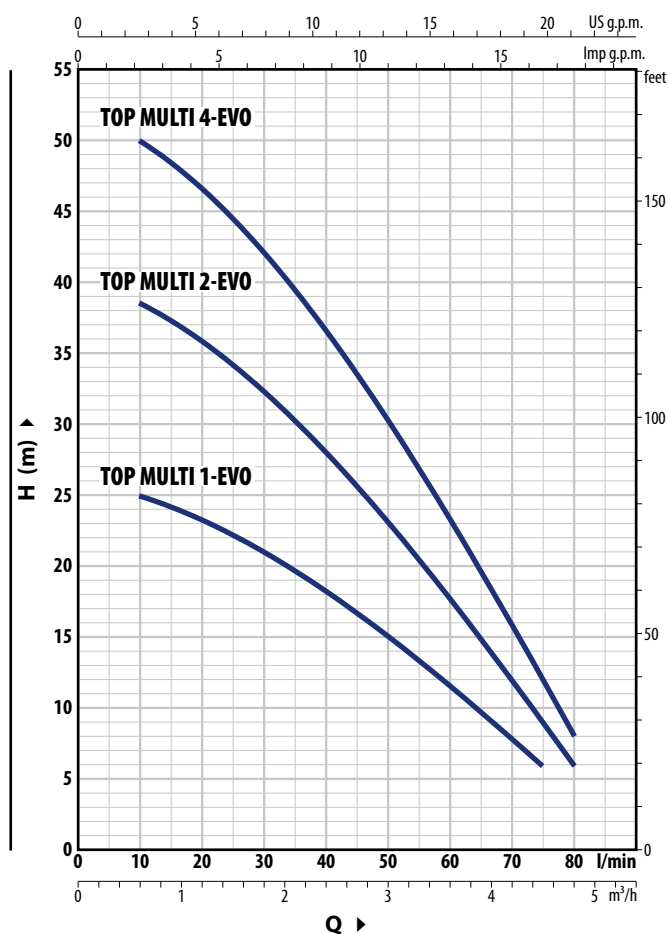

TOP MULTI 3-5 EVO

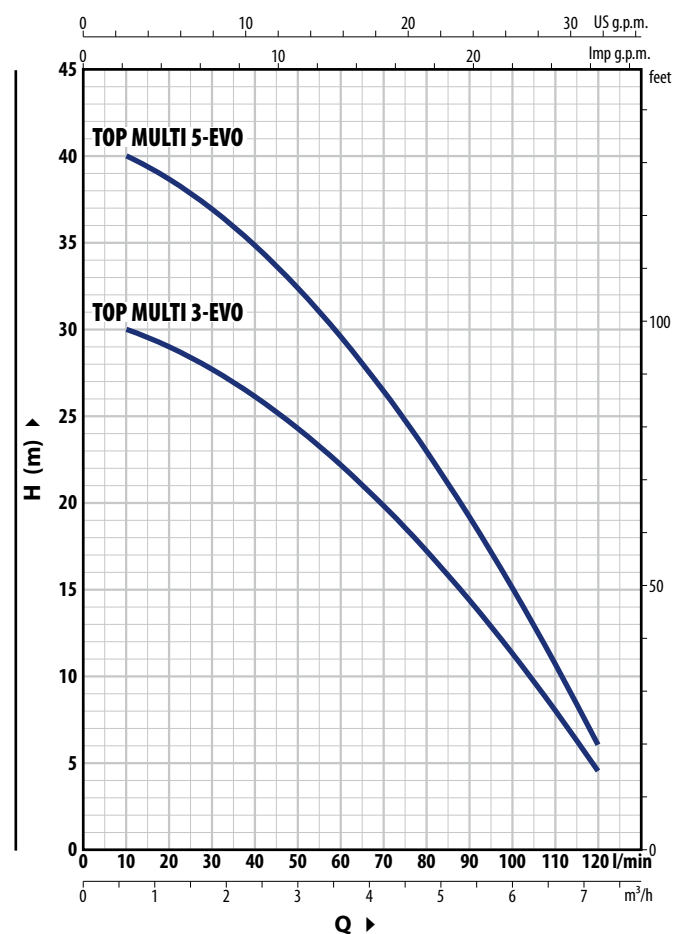

TOP MULTI 1-2-4 EVO

TYPE	POWER (P ₂)		Q										
	kW	HP		m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.5
Single-phase				l/min	0	10	20	30	40	50	60	70	80
TOP MULTI 1-EVO	0.37	0.50	H metres		26	25	23.3	21	18.3	15	11.6	8	6
TOP MULTI 2-EVO	0.55	0.75			40	38.5	36	32.5	28	23	17.7	12	9
TOP MULTI 4-EVO	0.75	1			52	50	46.5	42	36.5	30.5	23.3	15.8	12

TOP MULTI 3-5 EVO

TYPE	POWER (P ₂)		Q										
	kW	HP		m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
Single-phase				l/min	0	10	20	30	40	50	60	70	80
TOP MULTI 3-EVO	0.55	0.75	H metres		30.5	30	29	27.5	26	24.3	22.2	19.8	17.2
TOP MULTI 5-EVO	0.75	1			41	40	38.5	37	35	32.5	29.5	26.5	23

Q = Flow rate H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

ABSORPTION

TYPE	VOLTAGE
Single-phase	230 V
TOP MULTI 1-EVO	2.0 A
TOP MULTI 2-EVO	3.4 A
TOP MULTI 3-EVO	3.6 A
TOP MULTI 4-EVO	3.9 A
TOP MULTI 5-EVO	3.9 A

INSTALLATION EXAMPLES

